
**ULTRALITE 290** 

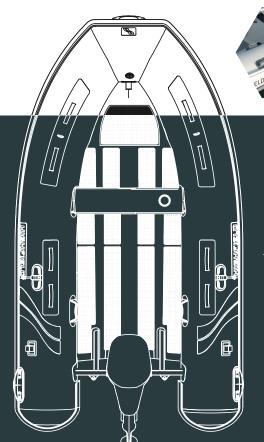

- STANDARD FEATURES

   ORCA® Hypalon or PVC tube

   Welded seams (PVC)

   Flush mount non-return valves

   High tensile chromated & powder coated aluminum hull

   Removable seat

   Lifting points and towing eyes

   Tow bridle points

   Anti-slip deck

   Light weight rubbing strake

  - Anti-slip deck
     Light weight rubbing strake
     Full length keel guard
     Under seat bag
     Highfield dry bag
    -Foot pump, oars, repair kit
     EVA

## **OPTIONAL EXTRAS**

- Extra seat
- Boat cover

## (OLOUR SCHEMES



OVERALL LENGTH	290cm	9′6″
INTERNAL LENGTH	214cm	7′
OVERALL WIDTH	154cm	5′1″
INTERNAL WIDTH	77cm	2′6″
DEADRISE	15°	
TUBE DIAMETER *	38cm	15″
NUMBER OF AIR CHAMBERS	3	
MAXIMUM LOAD	375kg	827lbs
MAXIMUM PEOPLE	4	
BOAT WEIGHT **	39kg	86lbs
MAXIMUM POWER	10hp	
ENGINE SHAFT	S	

\* larger tube diameters available \*\* boat only



